




DIMENSIONS – GAS BOILERS

LYNX

Modulating Condensing - High Efficiency

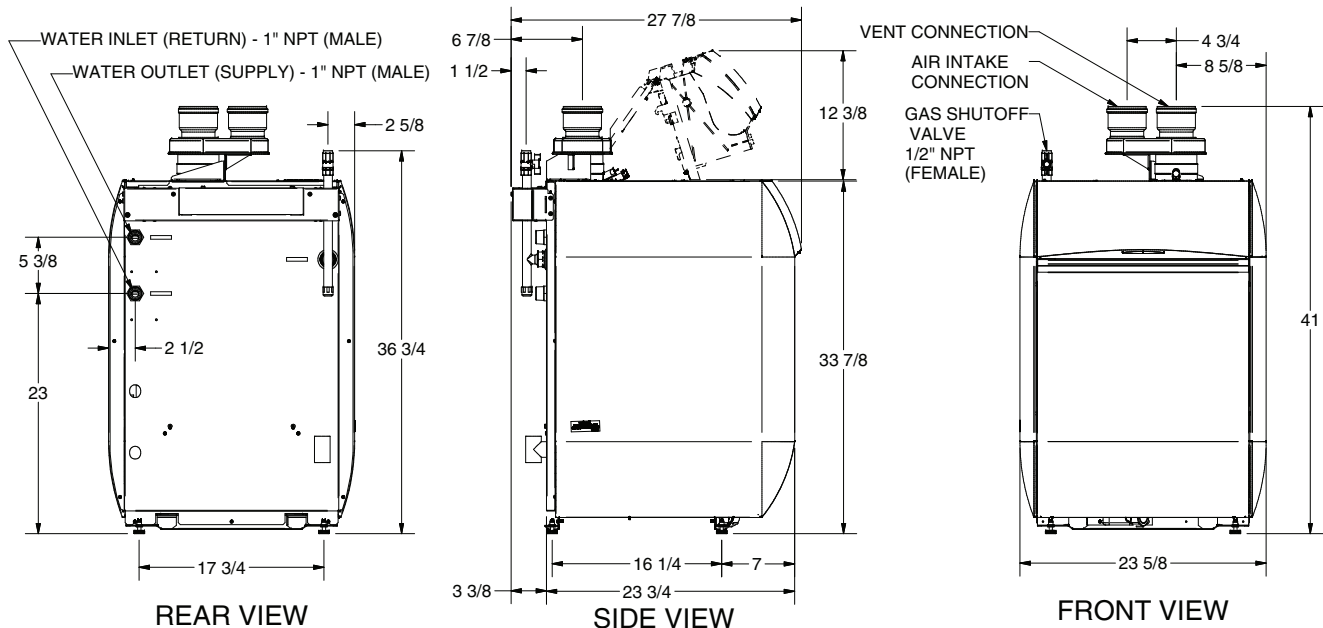

SPECIFICATIONS FOR LX-85 BOILER

Fuel Rate Input:	85,000 BTUH maximum 25,000 BTUH minimum
Boiler Water Volume:	.75 gallon (6.25 lbs)
Water Piping Connections:	1" NPT (male)
Gas Piping Connection:	1/2" NPT (female)
Vent Connection:	3" nominal I.D. pipe (PVC, CPVC or stainless steel)
Air Intake Connection:	3" nominal I.D. pipe (PVC, CPVC or stainless steel)
Weight of Boiler (uncrated):	105 lbs.
Gas orifice size:	Natural Gas - No orifice used * Propane - 0.190" diameter **

***Note:** No orifice changes are required for high altitude installations.

****See page 43 for conversion procedure to propane.**